
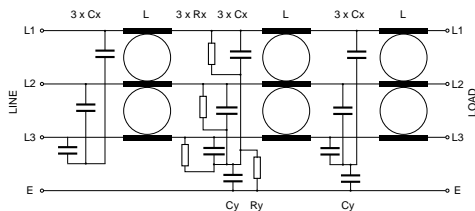




MHU Series Three Phase RFI Filters 380-480Vac, 48-62Hz

RFI filters for industrial applications up to 180A.
 All filters are constructed with self-healing interference suppression capacitors approved to EN132400 & UL. Input and output connections by shrouded type terminals.
 All units are UL1283 approved  and carry the CE mark.

Circuit Schematic
6-50A



70-180A

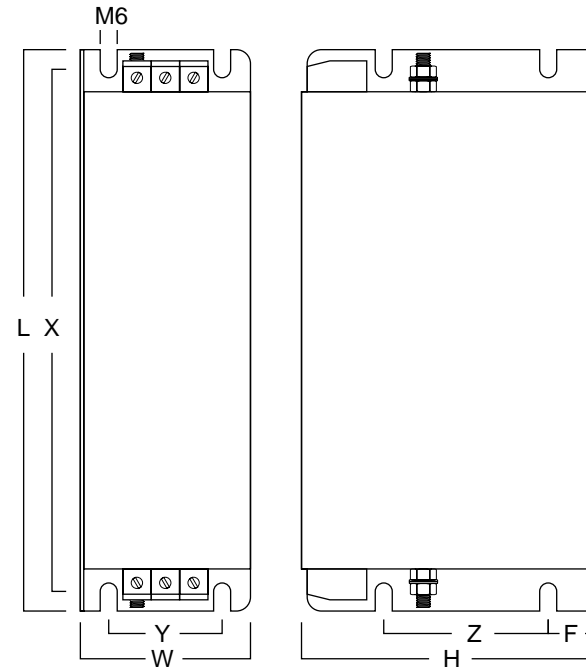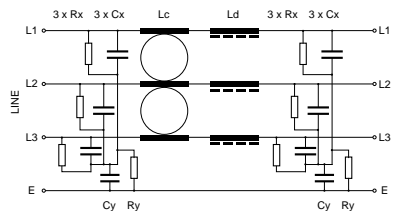

Filter part no.	Rated Current @ 40°C (A)	Leakage Current @ 440Vac 50Hz		Terminals (mm ²)	Earth Stud	Case Dimensions			Mounting				Wt (kg)
		nom (mA)	max			L	W	H (mm)	X	Y	Z	F (mm)	
RF 3006-MHU	6	0.2	14	0-6	M5	255	50	126	240	25	80	20	1.4
RF 3010-MHU	10	0.2	14	0-6	M5	255	50	126	240	25	80	20	1.4
RF 3016-MHU	16	0.2	14	0-10	M5	305	60	160	290	30	100	20	2.2
RF 3025-MHU	25	0.2	14	0-10	M5	305	60	160	290	30	100	20	2.4
RF 3040-MHU	40	0.3	40	0-25	M6	329	70	190	314	45	100	30	3.2
RF 3050-MHU	50	0.3	40	0-25	M6	329	70	190	314	45	100	30	3.4
RF 3070-MHU	68	0.7	70	6-35	M6	329	80	220	314	55	120	30	5.3
RF 3100-MHU	100	0.7	70	16-70	M8	379	90	220	364	65	110	30	5.6
RF 3130-MHU	130	1.3	130	25-120	M10	429	110	240	414	80	90	30	7.1
RF 3180-MHU	180	1.3	130	25-120	M10	429	110	240	414	80	90	30	7.5

RASMI ELECTRONICS LTD
 Tel: +44 (0) 1207 291300

Morrison Road, Annfield Plain, Stanley Co. Durham DH9 7RX
 Fax: +44 (0) 1207 291304 e-mail: sales@rasmi.com

