

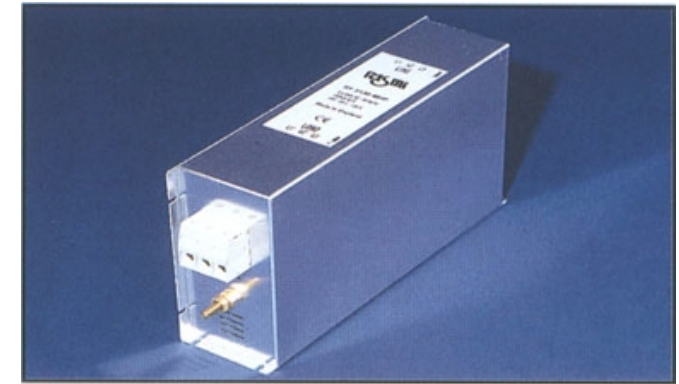


# FTF Series Three Phase RFI Filters 380-480Vac, 48-62Hz


RFI filters for industrial applications up to 180A.  
 All filters are constructed with self-healing interference suppression capacitors approved to EN132400 & UL. Input and output connections by shrouded type terminals.  
 All units carry the CE mark.

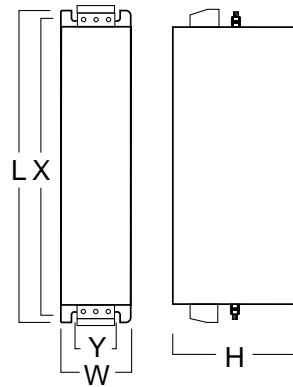

Circuit Schematic  
7-55A

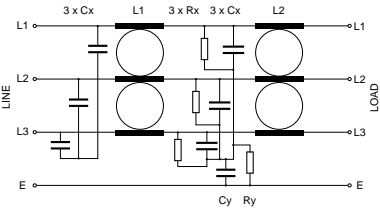

75-180A



Filter part no.	Rated Current @ 40°C (A)	Leakage Current @ 440Vac 50Hz nom (mA) max		Terminals (mm <sup>2</sup> )	Earth Stud	Case Dimensions L x W x H (mm)	Mounting X x Y x M (mm)	Wt (kg)
RF 3007-FTF	7	0.7	68	0-6	M5	190 x 40 x 70	175 x 20 x M5	0.5
RF 3016-FTF	16	1.3	130	0-6	M5	250 x 45 x 70	235 x 25 x M5	0.9
RF 3030-FTF	30	0.7	68	0-10	M5	270 x 50 x 85	255 x 30 x M5	1.1
RF 3042-FTF	42	1.3	130	0-10	M6	310 x 50 x 85	295 x 30 x M5	1.2
RF 3055-FTF	55	1.3	130	0-25	M6	250 x 85 x 90	235 x 60 x M5	1.8
RF 3075-FTF	75	2.0	160	0-25	M6	270 x 80 x 135	255 x 60 x M6	2.2
RF 3100-FTF	100	2.0	160	16-70	M10	270 x 90 x 150	255 x 65 x M6	2.8
RF 3130-FTF	130	2.0	160	16-70	M10	270 x 90 x 150	255 x 65 x M6	3.1
RF 3180-FTF	180	2.5	180	25-120	M10	380 x 120 x 170	365 x 102 x M6	5.7