

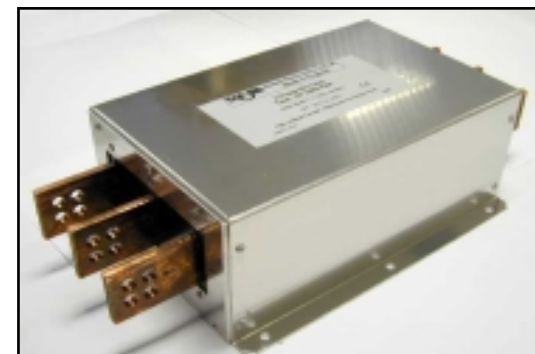


# FSX Series Three Phase RFI Filters 380-480Vac, 48-62Hz

RFI filters for industrial applications up to 2500A.  
 All filters are constructed with self-healing X and Y  
 interference suppression capacitors approved to  
 EN132400 & UL. Input and output connections by busbars.  
 All units are manufactured to EN133200 specifications and  
 carry the CE mark.

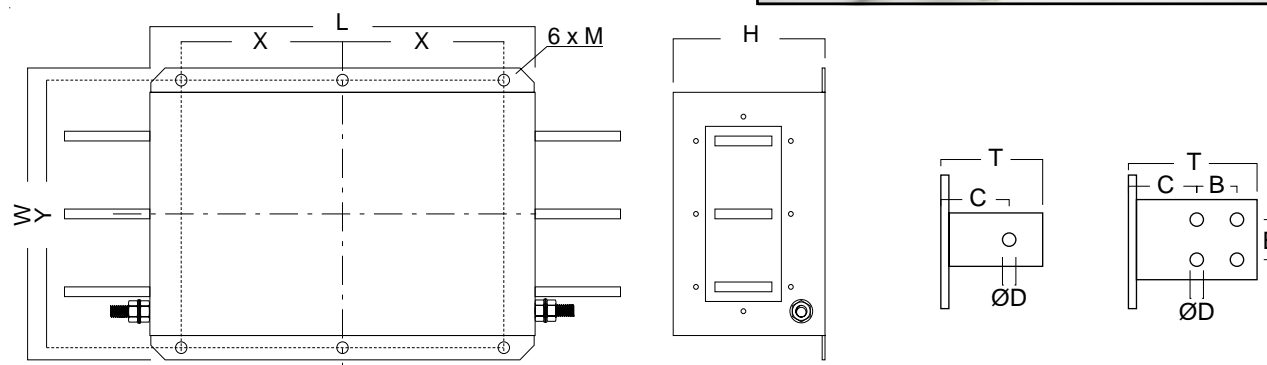

Circuit Schematic

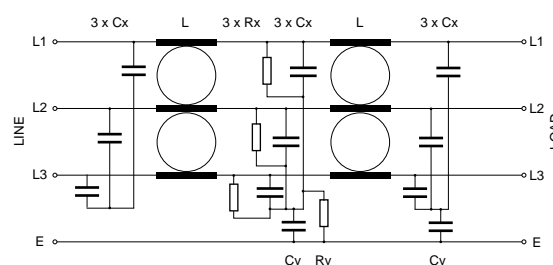

Filter part no.	Rated Current @ 40°C (A)	Leakage Current @ 440Vac 50Hz nom (mA) max		Case Dimensions L x W x H (mm)	Mounting X x Y x M (mm)	Terminals (mm)	Connection Dimensions (mm)			
		T	C				B	D		
RF 3250-FSX	250	1.3	130	300 x 260 x 135	120 x 205 x M10	25x5/Busbar	43	28	-	11
RF 3320-FSX	320	1.3	130	300 x 260 x 135	120 x 235 x M10	25x6/Busbar	43	28	-	11
RF 3400-FSX	400	1.3	130	300 x 260 x 135	120 x 235 x M10	25x6/Busbar	43	28	-	11
RF 3600-FSX	600	2	200	300 x 260 x 135	120 x 235 x M10	25x8/Busbar	43	28	-	11
RF 31k0-FSX	1000	2	200	350 x 280 x 150	145 x 255 x M10	40x8/Busbar	53	33	-	14
RF 31k6-FSX	1600	2	200	400 x 300 x 160	170 x 275 x M10	60x10/Busbar	93	50	26	14
RF 32k0-FSX	2000	2	200	600 x 370 x 170	250 x 330 x M12	70x10/Busbar	98	43	35	14
RF 32k5-FSX	2500	2	200	600 x 370 x 170	250 x 330 x M12	70x15/Busbar	98	43	35	14

RASMI ELECTRONICS LTD  
 Tel: +44 (0) 1207 291300

Morrison Road, Annfield Plain, Stanley Co. Durham DH9 7RX  
 Fax: +44 (0) 1207 291304 e-mail: sales@rasmi.com

