
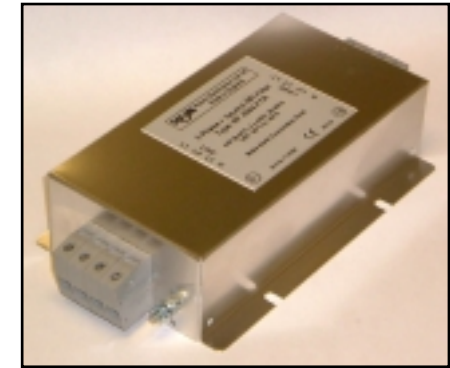
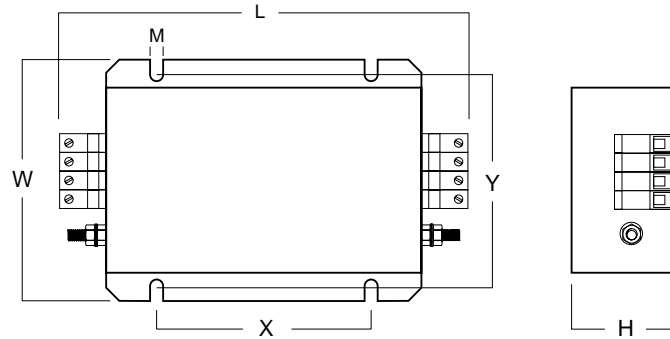


FTR Series Three Phase and Neutral RFI Filters

380-480Vac, 48-62Hz

RFI filters for industrial applications up to 160A.
All filters are constructed with self-healing X and Y interference suppression capacitors approved to EN132400 & UL. Input and output connections by shrouded terminals.
All units are manufactured to EN133200 specifications and carry the CE mark.

Circuit Schematic

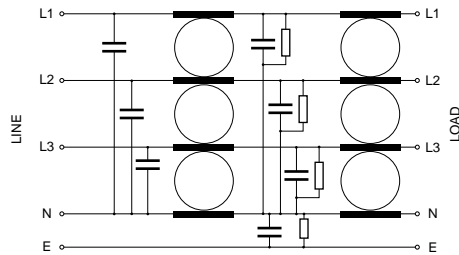

Filter part no.	Rated Current @ 40°C (A)	Leakage Current @ 440Vac 50Hz nom (mA) *	Case Dimensions L x W x H (mm)	Mounting X x Y x M (mm)	Terminals (mm ²)
RF 4008-FTR	8	0.05	144 x 143 x 80	80 x 128 x M6	0-6
RF 4016-FTR	16	0.05	144 x 143 x 80	80 x 128 x M6	0-6
RF 4025-FTR	25	0.05	162 x 153 x 115	90 x 138 x M6	0-10
RF 4036-FTR	36	0.05	162 x 153 x 115	90 x 138 x M6	0-10
RF 4064-FTR	64	0.05	238 x 153 x 125	100 x 138 x M6	6-35
RF 4080-FTR	80	0.05	316 x 163 x 125	120 x 148 x M6	16-70
RF 4120-FTR	120	0.05	336 x 170 x 140	200 x 154 x M6	16-70
RF 4160-FTR	160	0.05	380 x 170 x 170	230 x 154 x M6	25-120

* Neutral connected

RASMI ELECTRONICS LTD
Tel: +44 (0) 1207 291300

Morrison Road, Annfield Plain, Stanley Co. Durham DH9 7RX
Fax: +44 (0) 1207 291304 e-mail: sales@rasmi.com

rasmi Electronics Ltd rev.0.1