





FTT Series Three Phase and Neutral RFI Filters

380-480Vac, 48-62Hz

RFI filters for industrial applications up to 200A.
All filters are constructed with self-healing X and Y interference suppression capacitors approved to EN132400 & UL. Input and output connections by shrouded terminals.
All units are manufactured to EN133200 specifications and carry the CE mark.

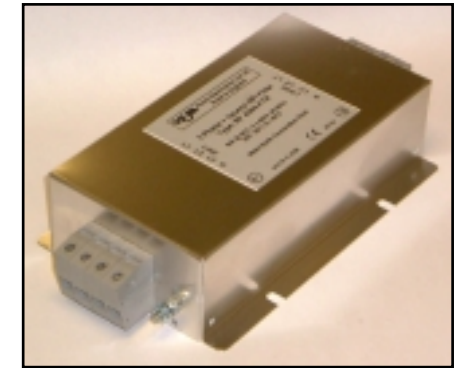

Circuit Schematic

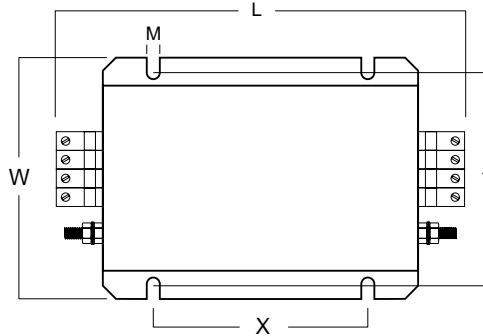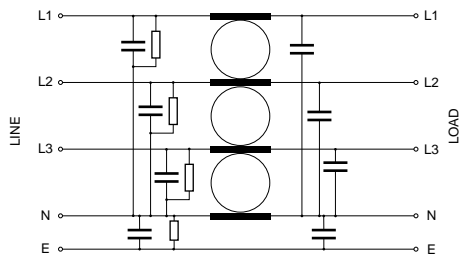

Filter part no.	Rated Current @ 40°C (A)	Leakage Current @ 440Vac 50Hz nom (mA) *	Case Dimensions L x W x H (mm)	Mounting X x Y x M (mm)	Terminals (mm ²)
RF 4016-FTT	16	0.05	178 x 140 x 65	70 x 125 x M6	0-6
RF 4025-FTT	25	0.05	246 x 159 x 65	115 x 145 x M6	0-10
RF 4036-FTT	36	0.05	246 x 159 x 65	115 x 145 x M6	0-10
RF 4063-FTT	63	0.05	280 x 159 x 75	115 x 145 x M6	0-25
RF 4080-FTT	80	0.05	306 x 168 x 120	115 x 155 x M6	16-70
RF 4110-FTT	110	0.05	306 x 168 x 120	115 x 155 x M6	16-70
RF 4150-FTT	150	0.05	306 x 168 x 120	115 x 155 x M6	16-70
RF 4150-FTT(95)	150	0.05	321 x 168 x 120	115 x 155 x M6	25-120
RF 4180-FTT	180	0.05	400 x 168 x 120	165 x 155 x M6	25-120
RF 4200-FTT	200	0.05	400 x 168 x 120	165 x 155 x M6	25-120

* neutral connected

RASMI ELECTRONICS LTD
Tel: +44 (0) 1207 291300

Morrison Road, Annfield Plain, Stanley Co. Durham DH9 7RX
Fax: +44 (0) 1207 291304 e-mail: sales@rasmi.com

rasmi Electronics Ltd
rev.0.1