
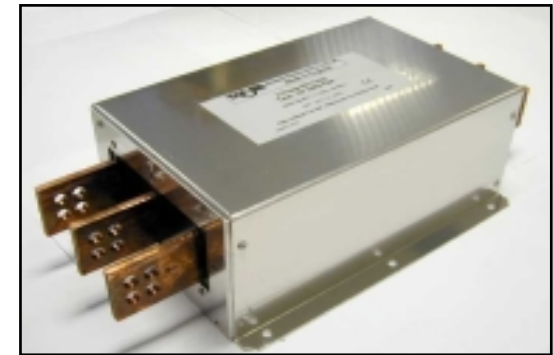




MHU Series Three Phase High Current RFI Filters

380-480Vac, 48-62Hz

RFI filters for industrial applications up to 2500A.
All filters are constructed with self-healing interference suppression capacitors approved to EN132400 & UL.
Input and output connections by busbars.
Units to 800A are UL1283 approved .
All units are manufactured to EN133200 specifications and carry the CE mark.



Circuit Schematic

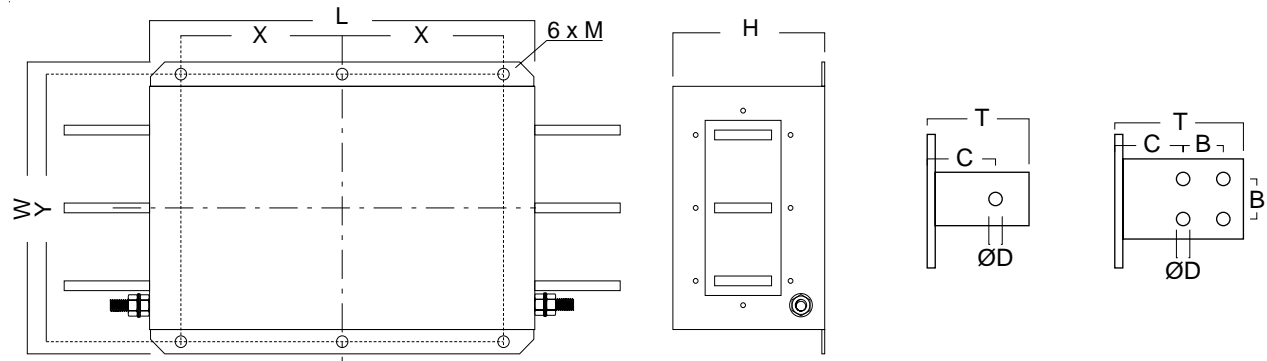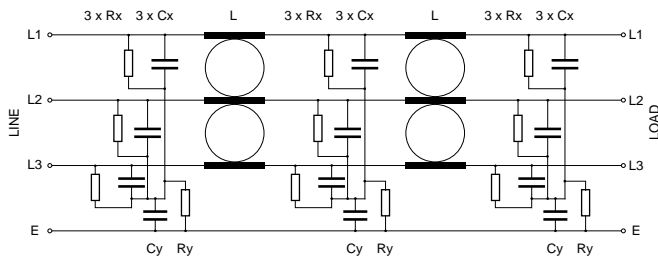

Filter part no.	Rated Current	Leakage Current @ 440Vac 50Hz		Busbar (mm)	Earth Stud	Connection Dimensions (mm)				Case Dimensions L x W x H (mm)	Mounting X x Y x M (mm)	Weight (kg)
		nom (mA)	max			T	C	B	D			
RF 3250-MHU	250A @ 40°C	10	500	25x5	M12	43	28	-	11	300 x 260 x 135	120 x 235 x M10	13.0
RF 3320-MHU	320A @ 40°C	10	500	25x6	M12	43	28	-	11	300 x 260 x 135	120 x 235 x M10	13.2
RF 3400-MHU	400A @ 40°C	10	500	25x6	M12	43	28	-	11	300 x 260 x 135	120 x 235 x M10	13.2
RF 3600-MHU	600A @ 25°C	10	500	25x8	M12	43	28	-	11	300 x 260 x 135	120 x 235 x M10	13.6
RF 3800-MHU	800A @ 25°C	10	500	40x8	M12	53	33	-	14	350 x 280 x 150	145 x 255 x M10	23.7
RF 31k0-MHU	1000A	10	500	40x8	M12	53	33	-	14	350 x 280 x 150	145 x 255 x M10	24
RF 31k6-MHU	1600A	2	200	60x10	M12	93	50	26	14	400 x 300 x 160	170 x 275 x M10	34
RF 32k0-MHU	2000A	2	200	70x10	M16	98	43	35	14	600 x 370 x 170	250 x 330 x M12	65
RF 32k5-MHU	2500A	2	200	70x15	M16	98	43	35	14	600 x 370 x 170	250 x 330 x M12	75

UNDER DEVELOPMENT

RASMI ELECTRONICS LTD
Tel: +44 (0) 1207 291300

Morrison Road, Annfield Plain, Stanley Co. Durham DH9 7RX
Fax: +44 (0) 1207 291304 e-mail: sales@rasmi.com

 rev.0.5
RASMI Electronics Ltd